

TECHNICAL SPECIFICATIONS FOR **ERGODRIVE** LET-OFF INSTALLATION
SULZER loom specs

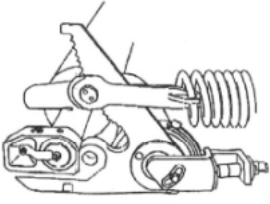






CUSTOMER:
.....
.....
.....
.....

AGENT:
.....
.....
.....
.....

LOOM: **SULZER** YEAR: SERIAL N°:



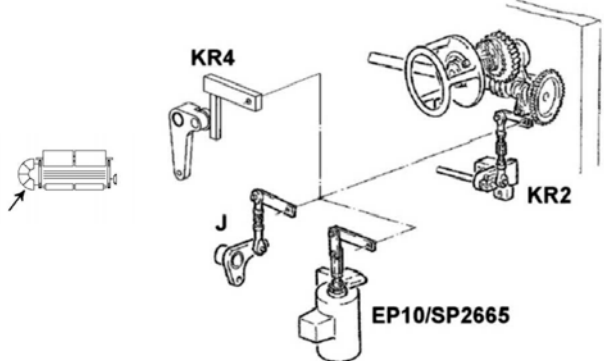
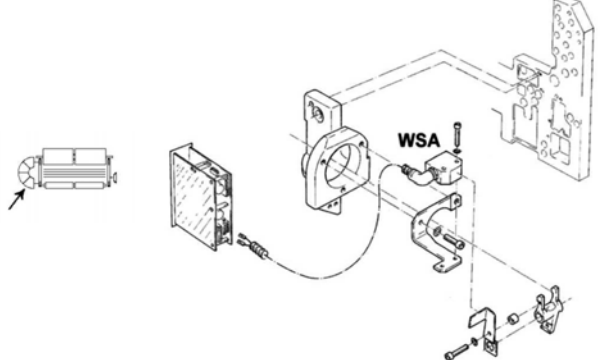
TYPE and WMK:		VERSION:		LOOM WIDTH:	
<input type="checkbox"/> TW11	SS	<input type="checkbox"/> Tappet cams (EP)		<input type="checkbox"/> 190 (73")	
<input type="checkbox"/> TW11	7	<input type="checkbox"/> Dobby (SP)		<input type="checkbox"/> 220 (85")	
<input type="checkbox"/> PU	9 911 302 039	<input type="checkbox"/> Automatic dobbie (SPE)		<input type="checkbox"/> 280 (110")	
<input type="checkbox"/> PU	9 911 302 177	Fill also page 3 (SPE) if dobbie is present		<input type="checkbox"/> 330 (130")	
<input type="checkbox"/> PU	9.2			<input type="checkbox"/> 360 (143")	
<input type="checkbox"/> P7100	9.3	<input type="checkbox"/> Jacquard (JM)		<input type="checkbox"/> 390 (153")	
<input type="checkbox"/> P-Lean	20 – 21	Fill also page 4 (JM) if Jacquard is present		<input type="checkbox"/> 430 (168")	
<input type="checkbox"/> P7150	20 – 21			<input type="checkbox"/> 460 (183")	
<input type="checkbox"/> P7200				<input type="checkbox"/> 540 (213")	
<input type="checkbox"/> P7250				<input type="checkbox"/> 560 (220")	
3PH POWER SUPPLY:	 V	<input type="checkbox"/> 50 Hz	<input type="checkbox"/> 60 Hz	
LOOM SPEED RPM:		MIN.	MAX.		
WEFT DENSITY /CM:		MIN. PPCM	MAX. PPCM	/INCH:	MIN. PPI MAX. PPI
PREFERRED WEFT DENSITY /CM:		MIN. PPCM	MAX. PPCM	/INCH:	MIN. PPI MAX. PPI
YARN TYPE:	<input type="checkbox"/> COTTON	<input type="checkbox"/> WOOL	<input type="checkbox"/> PURE SILK	<input type="checkbox"/> SYNTHETIC	<input type="checkbox"/> POLYPROPYLENE <input type="checkbox"/> other
WARP COUNT:		from	to		
WEFT COUNT:		from	to		
N° OF WARP ENDS:			MAX. TENSION PER END cN:		
WEAVING PATTERN:		<input type="checkbox"/> 1/1	<input type="checkbox"/> 2/1	<input type="checkbox"/> 3/1	<input type="checkbox"/> 4/1 <input type="checkbox"/>
EXISTING WARP LET-OFF:		<input type="checkbox"/> ERGOTRON Tendilene	<input type="checkbox"/> ERGOTRON KAERG	<input type="checkbox"/> other	
		<input type="checkbox"/> SULZER Mechanical	<input type="checkbox"/> SULZER KSA	<input type="checkbox"/> SULZER KAX	

TECHNICAL SPECIFICATIONS FOR **ERGODRIVE LET-OFF** INSTALLATION
SULZER loom specs

WHIPROLL:	<input type="checkbox"/> NORMAL		 			
	<input type="checkbox"/> NORMAL WITH FIXED ROLLER					
	<input type="checkbox"/> TORSION BAR					
DIFFERENTIAL:	<input type="checkbox"/> WITH	<input type="checkbox"/> WITHOUT				
AUTOMATIC HARNESES LEVELLING:	<input type="checkbox"/> WITH	<input type="checkbox"/> WITHOUT				
SULZER OIL BATH GROUP:	<input type="checkbox"/> 2:53	 				
	<input type="checkbox"/> 1:53					
SULZER SCREW / SPROCKET GEAR:	<input type="checkbox"/> 6:36	<input type="checkbox"/> 3:38	 			
	<input type="checkbox"/> 2:39	<input type="checkbox"/> 1:39				
	<input type="checkbox"/> 1:66					
FLANGE SCREW-HOLE CIRCLE MM:	<input type="checkbox"/> 115					
	<input type="checkbox"/> 120					
	<input type="checkbox"/> 150					
WARP BEAM FLANGE MM:	<input type="checkbox"/> 700	<input type="checkbox"/> 800	<input type="checkbox"/> 940	<input type="checkbox"/> 1000	<input type="checkbox"/> 1016	<input type="checkbox"/> 1100
BEAM BARRELL MM:	<input type="checkbox"/> 140	<input type="checkbox"/> 150	<input type="checkbox"/> 216	<input type="checkbox"/> 262	<input type="checkbox"/> 270	








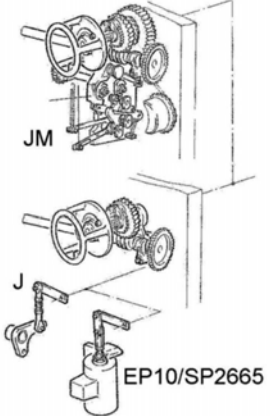
TECHNICAL SPECIFICATIONS FOR **ERGODRIVE** LET-OFF INSTALLATION **SULZER loom specs**

Automatic Dobby (SPE)

<p>AUTOMATIC DOBBY:</p>	<p><input type="checkbox"/> STÄUBLI 2665.001 </p> 	
	<p><input type="checkbox"/> STÄUBLI</p>	
	<p><input type="checkbox"/> KAISER</p>	
<p>WSA CRAMMING DEVICE:</p>	<p><input type="checkbox"/> NO</p>	<p><input type="checkbox"/> EP10 /SP2665</p> <p><input type="checkbox"/> KR2</p> <p><input type="checkbox"/> KR4</p> <p><input type="checkbox"/> J</p> 
<p>WSA CRAMMING SENSOR:</p>	<p><input type="checkbox"/> NO</p>	<p><input type="checkbox"/> YES</p> 

TECHNICAL SPECIFICATIONS FOR **ERGODRIVE** LET-OFF INSTALLATION **SULZER loom specs**

Jacquard (JM)

<p>JACQUARD:</p>	<input type="checkbox"/> STÄUBLI JC4 		
	<input type="checkbox"/> STÄUBLI JC5 		
	<input type="checkbox"/> BONAS IBJ2 		
	<input type="checkbox"/> GROSSE EJP-2HS 		
<p>WSA CRAMMING DEVICE:</p>	<input type="checkbox"/> NO	<input type="checkbox"/> EP10 /SP2665 <input type="checkbox"/> J  <input type="checkbox"/> JM	
<p>WSA CRAMMING SENSOR:</p>	<input type="checkbox"/> NO	<input type="checkbox"/> YES	